


#### NOTES:

- 1) PRIMARY DIM: A .DIE NO:DD15Z14,OSOD194
- 2) INSULATION RESISTANCE:10M ohm (MIN) 300V/DC
- 3) CONTACT RESISTANCE:5 ohm (MAX)
- 4) RoHS COMPLIANT.

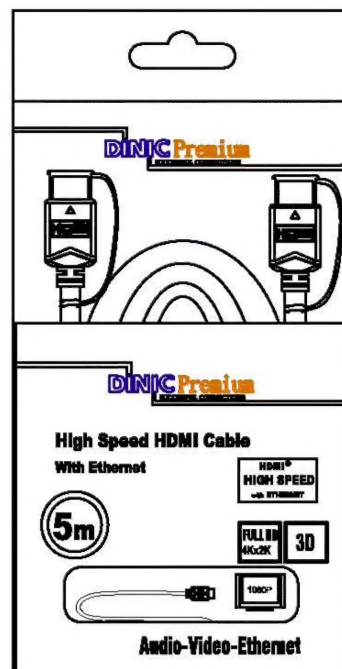

WEIGHT	CUSTOMER NO.	REMARK
430g-K5	HDMI-5HQ	MAG

P1 HDMI	P2 HDMI
RED CORE { 2, 1, 3 }	2 GND 1 WHITE 3 RED
GREEN CORE { 5, 4, 6 }	5 GND 4 WHITE 6 GREEN
BLUE CORE { 8, 7, 9 }	8 GND 7 WHITE 9 BLUE
BROWN CORE { 11, 10, 12 }	11 GND 10 WHITE 12 BROWN
BROWN CORE { 17, 19, 14 }	17 GND 19 WHITE 14 BLACK
13	13 ORANGE
15	15 WHITE
16	16 YELLOW
18	18 RED
SHELL	BRAID
	SHELL

3	OUTER JACKET PVC 45Pa BLACK(1101) (RoHS)
2	HDMI A TYPE PLUG TERMINAL PLATED GOLD 15U" SHELL PLATED GOLD FLASH RoHS
1	High Speed HDMI With Ethernet UL20276 (28#1P++D+A)5+28#4C+A+B(64BAM) OD7.3 BLACK (1101) 5000MM RoHS

A	FIRST EDITION	TU	04/01/10
REV.	ECR	DESCRIPTION	C.N.
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.			
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°			
DIMENSIONS		TOLERANCE	
0.00 TO 30.00mm		±0.10mm	
30.01 TO 80.00mm		±0.13mm	
80.01 TO 150.00mm		±0.15mm	
150.01mm		±0.20mm	
MATERIAL		MATERIAL	
FINISH		FINISH	
TITLE		HDMI CABLE W/ETHERNET	
CHKD.		CONF.	
DR. TU		APPD.	
PART NO.		2162-2417	
SCALE		SHEET 1/1	
UNIT		MM	
SIZE		A4	
REV.		A	